




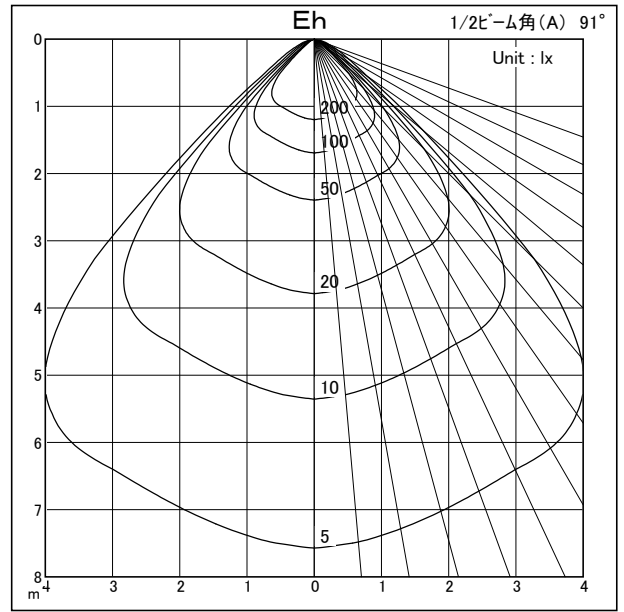

カタログ番号	L4273B		
使用ランプ	LED 4.9W		
ランプ光束	529.0	lm	1,000
器具効率	100.0 %		
下方効率	100.0 %		
上方効率	0.0 %		
最大取付間隔			
A断面	1.47 H		
C断面			
B断面			

	角度	光度
	0°	287
	10°	278
	20°	272
	30°	285
	40°	249
	50°	34
	60°	3
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

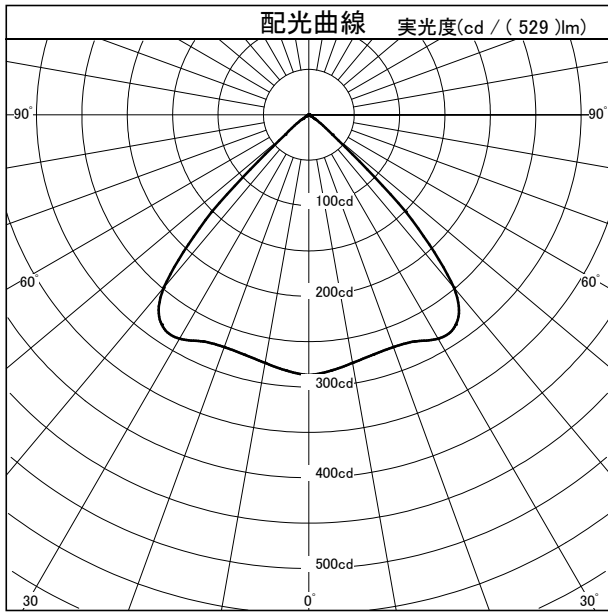

照明率表		平均照度=台数 * 照明率 * 保守率 * 529 (光束)/(間口 * 奥行)													
床面反射率(%)		20													
天井面反射率(%)		80			60			40			20			0	
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.51	0.44	0.39	0.50	0.44	0.39	0.49	0.43	0.39	0.48	0.43	0.39	0.37	
	0.70	0.66	0.59	0.55	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.58	0.54	0.52	
	1.00	0.80	0.74	0.69	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.70	0.67	0.65	
	1.25	0.87	0.81	0.76	0.85	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.73	0.71	
	1.50	0.92	0.86	0.82	0.89	0.84	0.80	0.87	0.83	0.79	0.84	0.81	0.78	0.76	
	指	2.00	0.98	0.93	0.89	0.95	0.91	0.87	0.92	0.88	0.86	0.89	0.86	0.84	0.82
		2.50	1.02	0.97	0.94	0.98	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.88	0.85
		3.00	1.04	1.00	0.97	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.87
		4.00	1.08	1.05	1.02	1.04	1.01	0.99	1.00	0.98	0.96	0.97	0.95	0.94	0.91
	数	5.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.00	0.99	0.98	0.97	0.96	0.92
7.00		1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.95	
	10.00	1.14	1.13	1.12	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.01	1.00	0.96	